ATS-3PC150-22

Double Throw ATS With Neutral OFF

Rated Current 150 Amps Voltage 220/120 VAC

Features

- Programmable Control ATS
- Open Transition-Delay on center OFF 1 to 20 sec.
- Electrically operated mechanically held type ATS
- Manual Emergency Override handle
- NEMA 3R enclosure with lock
- Switch Position connection indicator lights
- Checks for normal source over and under voltages
- Built-in 7-Days exerciser -- with or without load
- Adjustable TDEN, TDNE, TDES, TDEC timers
- Designed for the cell-phone industry, industrial & home use
- Compact size, easy instalation

ATS-3P150-22 Specifications

Rated Voltage	120/240 VAC
Rated Current	150 A
Rated Frequency	50/60 Hz
Transfer	Double Throw Type
Operating Current	2.6A @ 220V
Poles	3P
Rated Short-Time Current	10 KA/one sec. @ 250 VAC
Short Circuit Peak Value	25 KA
Utilization Category	AC-33A*
Life	>6000 Times With Load
Model Number	TSC3P150-22
Class	PC
Connection	Front
Plastic	UL94V-0

Overvoltage Trip	270VAC Adjustable	
Overvoltage Reset	260VAC	
Undervoltage Trip	170VAC Adjustable	
Undervoltage Reset	180VAC	
Adjustable Time Delay	TDEN	0 ~ 30 Sec. ±10%
	TDNE	0 ~ 30 Sec. ±10%
	TDEC	0 ~ 120 Sec. ±10%
	TDES	0 ~ 90 Sec. ±10%
	TD OFF	0 ~ 18 Sec. ±10%

Remote Start Dry Contact Capacity	6A @ 277 VAC / 6A @ 28 VDC Max
Power Consumption	< 1W
Door Mount Cut-Out	47.0± 0.5 mm Wide x 162 ± 0.5 mm 1.8 Inches wide x 6.4 Inches High

Mechanical Specifications



Front View

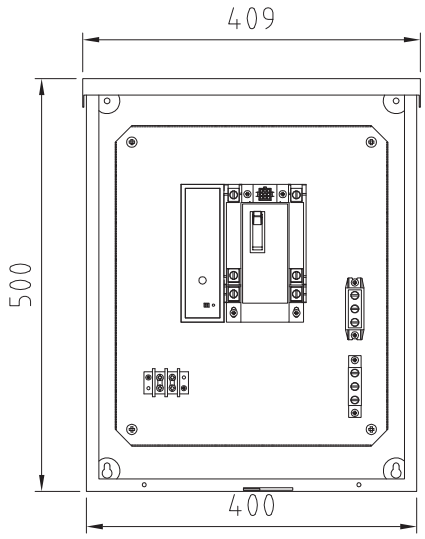

Internal View

General Specifications

Weight		12,25Kg - 27 lbs	
Dimensions	High	19.75 Inches	500mm
	Wide	15.75 Incehs	400mm
	Deep	5.5 Inches	140mm

Note: IEC60947-6 Utilization Category AC-33A

1. Frequent operations
2. Motor loads or mixed loads including motors, resistive loads and up to 30% incandescent lamp

JOVAL INDUSTRIAL
EFFICIENCY - EXCELLENCE - EXPERIENCE

CONTACT US TODAY!
JOVAL INDUSTRIAL LLC
MIAMI FL USA
P. 1-877-335-6825
Email: sales@jovalindustrial.com
www.jovalindustrial.com