

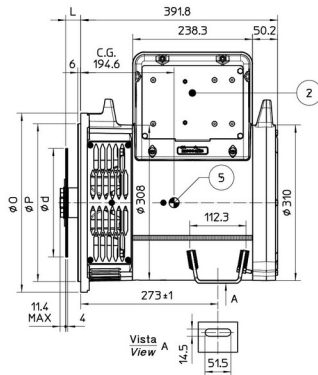


SINGLE BEARING DIMENSIONS

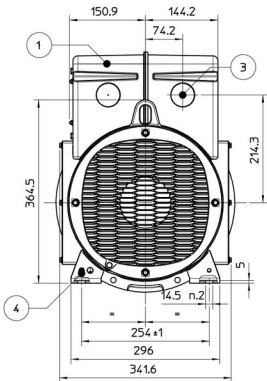

SAE N.	FLANGIA/FLANGE BRIDE/FLANSCH				
	O	P	Q	α	N
5	356	314,3	333,4	45°	8
4	403	362,0	381,0	30°	12
3	451	409,6	428,6	30°	12
2	490	447,7	466,7	30°	12

SAE N.	GIUNTI A DISCHI / DISC COUPLING					
	DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	d	L	Q1	S1	$\alpha 1$	N1
6 1/2	215,90	30,2	200,00	9	60°	6
7 1/2	241,30	30,2	222,25	9	45°	8
8	263,62	62,0	244,47	11	60°	6
9	314,32	39,6	293,27	11	45°	8
10 1/2	352,42	39,6	333,37	11	45°	8

COPERCHIO REMOVIBILE PER ACCESSO AI TERMINALI PRINCIPALI

1) REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS

PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE

2) REMOVABLE PANEL FOR ACCESS TO AVR

PRE-TAGLIO PER INGRESSO CAVI $\phi 48\text{mm}$

3) PRE-CUT FOR CABLE ENTRY @

VITE M6 PER MESSA A TEE

4) SCREW M6 FOR GROUNDING

www.lovalindustrial.com

5) GRAVITY CENTER IN CONFIGURATION SAE 3 (VOLUME 1)

Joval Industrial Miami FL USA

16 FOR GROUNDING

Contact Us Today

C.G.= GRAVITY CENTER