

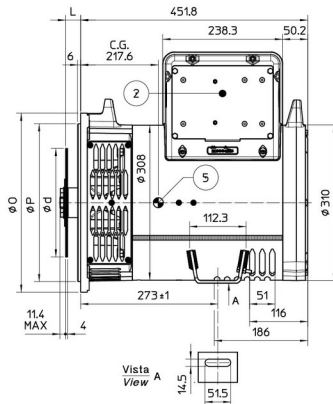


# SINGLE BEARING DIMENSIONS

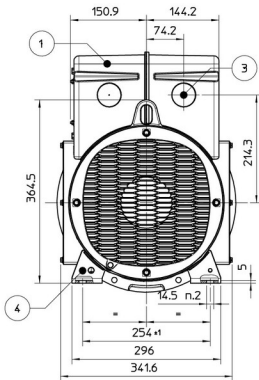

| SAE<br>N. | FLANGIA/FLANGE<br>BRIDE/FLANSCH |       |       |     |    |
|-----------|---------------------------------|-------|-------|-----|----|
|           | O                               | P     | Q     | α   | N  |
| 5         | 356                             | 314.3 | 333.4 | 45° | 8  |
| 4         | 403                             | 362.0 | 381.0 | 30° | 12 |
| 3         | 451                             | 409.6 | 428.6 | 30° | 12 |
| 2         | 490                             | 447.7 | 466.7 | 30° | 12 |

| SAE<br>N. | GIUNTI A DISCHI / DISC COUPLING<br>DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG |      |        |    |     |    |
|-----------|----------------------------------------------------------------------------|------|--------|----|-----|----|
|           | d                                                                          | L    | Q1     | S1 | α1  | N1 |
| 6 1/2     | 215.90                                                                     | 30.2 | 200.00 | 9  | 60° | 6  |
| 7 1/2     | 241.30                                                                     | 30.2 | 222.25 | 9  | 45° | 8  |
| 8         | 263.53                                                                     | 30.2 | 244.47 | 11 | 60° | 6  |
| 10        | 314.32                                                                     | 39.6 | 293.27 | 11 | 45° | 8  |
| 11 1/2    | 352.42                                                                     | 39.6 | 333.37 | 11 | 45° | 8  |

- 1) COPERCHIO REMOVIBILE PER ACCESSO AI TERMINALI PRINCIPALI  
REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
- 2) PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE  
REMOVABLE PANEL FOR ACCESS TO AVR
- 3) PRE-TAGLIO PER INGRESSO CAVI Ø48mm  
PRE-CUT FOR CABLE ENTRY Ø48mm
- 4) VITE M6 PER MESSA A TERRA  
SCREW M6 FOR GROUNDING
- 5) CENTRO DI GRAVITA' IN CONFIGURAZIONE SAE 3 FLYWHEEL 11.5  
GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11.5